


FIG. 5

CONVERSION RULE

KEY CODE: $\mathbf{0xFF}$ DATA: $\mathbf{0x00} \sim \mathbf{0xFD} \rightarrow \mathbf{NOT} \text{ CONVERTED}$ $\mathbf{0xFE} \rightarrow \mathbf{0xFE} \mathbf{0x00}$ $\mathbf{0xFF} \rightarrow \mathbf{0xFE} \mathbf{0x01}$

FIG. 6

EXAMPLE OF FORMAT OF CONTROL DATA

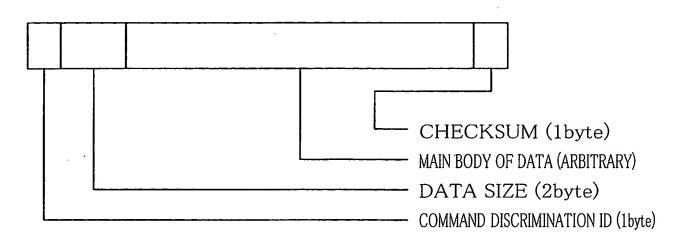

6/12

FIG. 7(a)

CONTROL COMMAND FOR WIRELESS STATION 1 (COMMAND DISCRIMINATION ID=1)

[BEFORE CONVERSION]

0x01 0x05 0x01 <u>0xFE</u> 0x02 <u>0xFF</u> 0xA0 0x01

[AFTER CONVERSION]

<u>0xFF</u> 0x01 0x05 0x01 <u>0xFE 0x00</u> 0x02 <u>0xFE 0x01</u> 0xA0 0x01

FIG. 7(b)

CONTROL COMMAND FOR WIRELESS STATION 2 (COMMAND DISCRIMINATION ID=2)

[BEFORE CONVERSION]

0x02 0x05 0x01 <u>0xFE</u> 0x02 <u>0xFF</u> 0xA0 0x02

[AFTER CONVERSION]

<u>0xFF</u> 0x02 0x05 0x01 <u>0xFE 0x00</u> 0x02 <u>0xFE 0x01</u> 0xA0 0x02

FIG. 7(c)

CONTROL COMMAND FOR CONTROLLED DEVICE (COMMAND DISCRIMINATION ID=3)

[BEFORE CONVERSION]

0x03 0x05 0x01 0xFE 0x02 0xFF 0xA0 0x03

[AFTER CONVERSION]

0xFF 0x03 0x05 0x01 0xFE 0x00 0x02 0xFE 0x01 0xA0 0x03

FIG. 7(d)

CONTROL COMMAND FOR EXTERNAL DEVICE (COMMAND DISCRIMINATION ID=4)

[BEFORE CONVERSION]

0x04 0x05 0x01 <u>0xFE</u> 0x02 <u>0xFF</u> 0xA0 0x04

[AFTER CONVERSION]

<u>0xFF</u> 0x04 0x05 0x01 <u>0xFE 0x00</u> 0x02 <u>0xFE 0x01</u> 0xA0 0x04

FIG. 8(a)





FIG. 8(b)

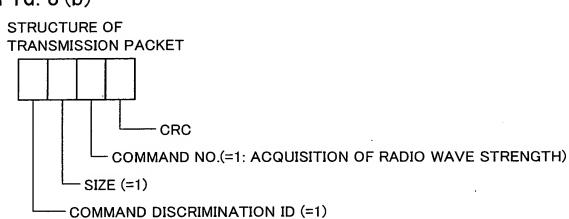

8/12

FIG. 9(a)





FIG. 9(b)

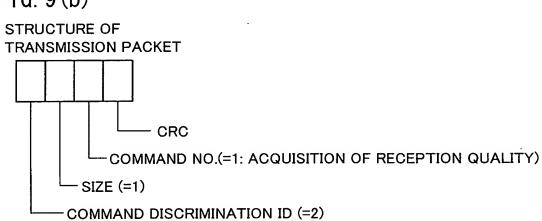

9/12

FIG. 10(a)





FIG. 10(b)

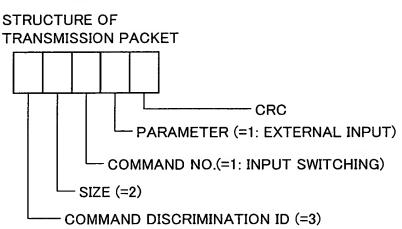

10/12

FIG. 11(a)






FIG. 11(b)



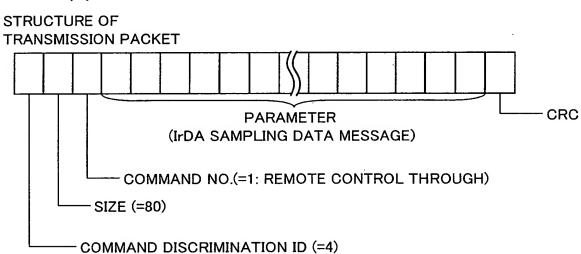

F1G. 12

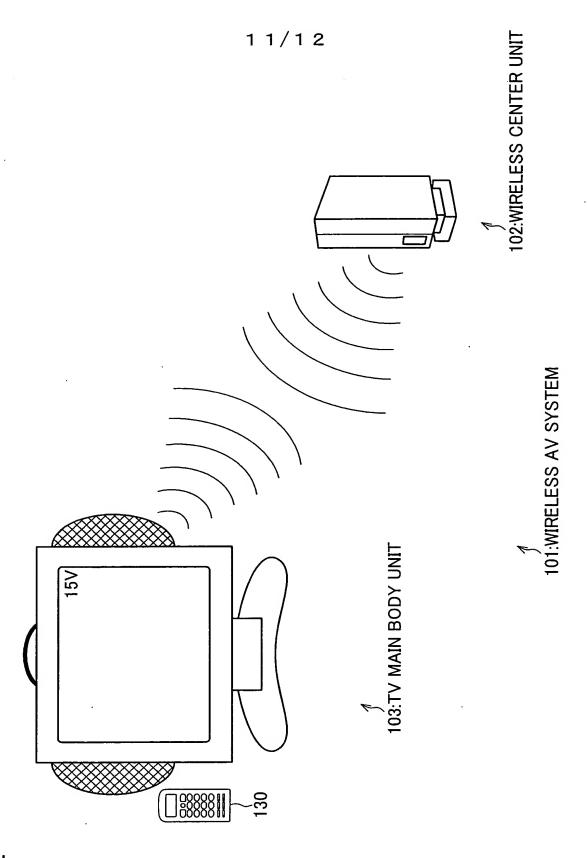